

FOUR SPIRAL - 4SP HOSE



4 SP

Tube: Oil resistant synthetic rubber

Reinforcement: Four high tensile steel wire spirals


Cover: Abrasion, ozone and hydrocarbon resistant synthetic rubber

Application: Very high pressure hydraulic lines, fuel oil, air & water

Temp : - 40°C to + 100°C

| Catalog No. | I.D. mm | Working Pressure Kg/cm ² | Test Pressure Kg/cm ² | Burst Pressure Kg/cm ² | Minimum Bend Radius mm |
|-------------|------------|--|-------------------------------------|--------------------------------------|---------------------------|
| SP4-04 | 6.4 | 460 | 920 | 1840 | 150 |
| SP4-06 | 9.5 | 453 | 906 | 1812 | 180 |
| SP4-08 | 12.7 | 421 | 842 | 1684 | 230 |
| SP4-10 | 15.9 | 351 | 702 | 1404 | 250 |
| SP4-12 | 19.0 | 351 | 702 | 1404 | 300 |
| SP4-16 | 25.4 | 281 | 562 | 1124 | 340 |

FOUR SPIRAL - 4SH HOSE

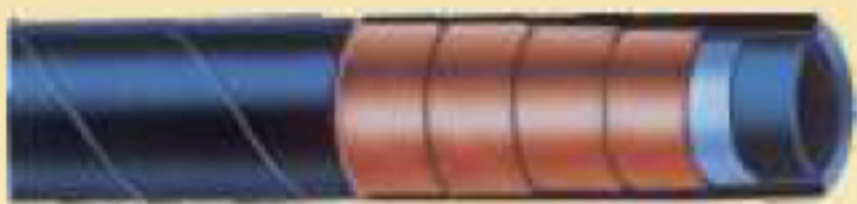

4 SH

Tube: Oil resistant synthetic rubber

Reinforcement: Four high tensile steel wire spirals

Cover: Abrasion, ozone and hydrocarbon resistant synthetic rubber

Application: Very high pressure hydraulic lines, fuel oil, air & water

Temp : - 40 °c to + 100°C

| | | | | | |
|--------|------|-----|-----|------|-----|
| SH4-12 | 19.0 | 421 | 842 | 1684 | 280 |
| SH4-16 | 25.4 | 386 | 772 | 1544 | 340 |
| SH4-20 | 31.8 | 330 | 660 | 1320 | 460 |
| SH4-24 | 38.1 | 295 | 590 | 1180 | 560 |
| SH4-32 | 50.8 | 256 | 512 | 1024 | 700 |

SIX SPIRALS - R13 HOSE



R 13

Tube: Oil resistant synthetic rubber

Reinforcement: Six high tensile steel wire spirals

Cover: Abrasion, ozone and hydrocarbon resistant synthetic rubber

Application: Very high pressure hydraulic lines, fuel oil, air & water

Temp : - 40°C to + 100°C

| | | | | | |
|--------|------|-----|-----|------|-----|
| R13-12 | 19.0 | 351 | 702 | 1404 | 241 |
| R13-16 | 25.4 | 351 | 702 | 1404 | 305 |
| R13-20 | 31.8 | 351 | 702 | 1404 | 419 |
| R13-24 | 38.1 | 351 | 702 | 1404 | 508 |
| R13-32 | 50.8 | 351 | 702 | 1404 | 635 |